



CONTRACTOR	
PROJECT	DATE
PREPARED BY	MODEL : WC TSTAT18/2-500


SERIES SPECIFICATIONS

18/2 THERMOSTAT WIRE, 500FT REEL, BROWN

- Impact & Chemical Resistant
- Unique 6 grip design for superior grip on cord
- Unique 2 key design for easy alignment
- Neoprene Gasket seals out dust and debris



LINE DRAWING

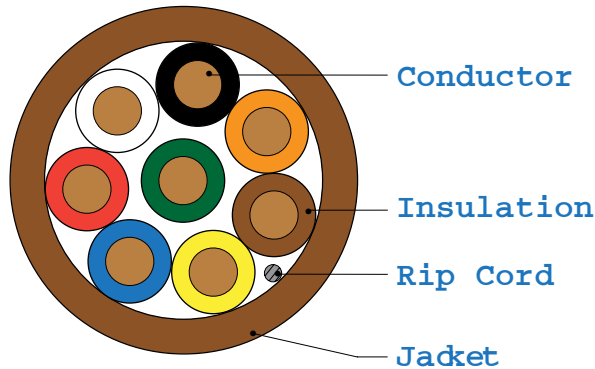

CONDUCTOR	COLOR CODING
C1	RED
C2	WHITE
C3	GREEN
C4	BLUE
C5	YELLOW
C6	BROWN
C7	ORANGE
C8	BLACK

*Color codes indicative to number of conductors.
Example: 18 AWG, 3 Conductor = C1-C3
Color hues may vary slightly from those pictured.

CONSTRUCTION

Conductor
18 AWG (1.02mm) Bare Copper

Stranding
Solid

Insulation Material
PVC

Number of Conductors
2

Lay Length
Parallel/Twist

Insulation Thickness
0.008" (0.203mm) Nom.

Jacket Material
0.0169" (0.43mm) Nom.

Jacket Color
Brown

Insulation Color
Red/White

Insulation Conductor Dia.
0.057" (1.45mm) Nom.

Overall Cable Dia.
0.148" (3.76mm) Nom.

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



404 NW ENTERPRISE DR. PORT ST. LUCIE, FL 34986 | 772.408.5213 | WWW.RPP-USA.COM



CONTRACTOR	
PROJECT	DATE
PREPARED BY	MODEL : WC TSTAT18/2-500

ELECTRICAL SPECIFICATIONS

Temp. Rating
-20°C ~ 60°C

Operating Voltage
150V

Capacitance between
Conductor @ 1K Hz
25pF/ft. Nom.

DC Resistance per Conductor
@ 20°C
6.32 Ohms/1M' Nom.

CERTIFICATIONS/WARRANTY

Listing
UL Listed

Warranty
Guaranteed for one year from the purchase date of the product, against mechanical defects in manufacturing.

ORDERING INFORMATION

Part Number: WC TSTAT18/2-250

Box Qty : 500 Ft.

IMS Code : 0315-0996

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



404 NW ENTERPRISE DR. PORT ST. LUCIE, FL 34986 | 772.408.5213 | WWW.RPP-USA.COM